

# 7600 Showermaster®

**76-5A**

**1/2" inlets & outlet**
**CONCEALED PIPING**
**7600 Thermostatic Showermaster®**

- Tub/shower installation
- Copper encapsulated thermostat assembly with brass shuttle, compensates for temperature fluctuations induced by water temperature and pressure changes
- Built-in shutoff for single handle operation
- Maximum operating pressure: 125 PSI (860 KPA)
- Adjustable high temperature limit stop set for 110°F (43°C)
- Dial, Off through Hot, with directional indicators
- 1/2" inlets and outlet
- 501P(G) Hand Shower (2.5GPM, 9.5 l/min), with glide rail, double check valve assembly, elbow and flange

Note: All piping and fittings not furnished by manufacturer.


VALVE IS ASSE 1016 TYPE T LISTED  
 VALVE IS CSA LISTED



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.Ca.gov](http://www.P65Warnings.Ca.gov)

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

<b>Engineer's Approval</b>	Job # _____
	Arch/Eng. _____
	Contractor _____

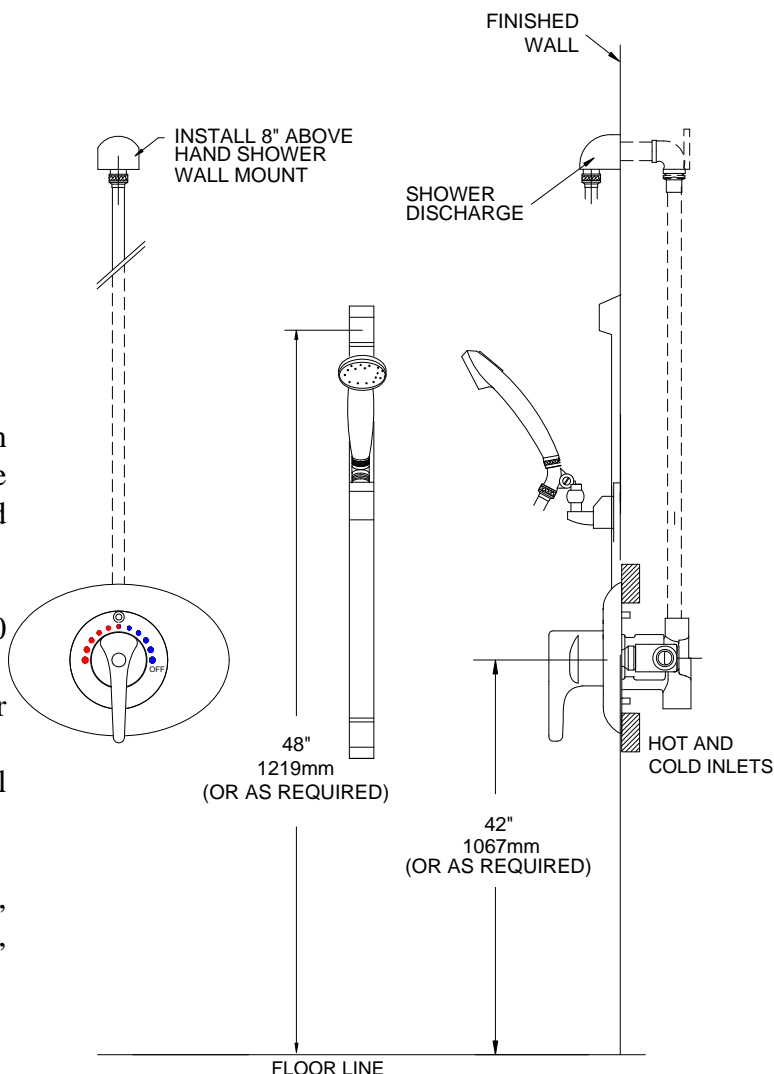

All Leonard Model 7600 Thermostatic Shower Valves have limitations. Please keep in mind that per the ASSE 1016-2011 Performance Standard, Harmonized along with ASME and CSA, it dictates inlet conditions of equal pressures, 45 PSI on both Hot and Cold Inlets, in addition to a Hot supply temperature range of 140 deg F-180 deg F. Significant deviations from those conditions stated above will alter performance expectations.



1360 Elmwood Avenue, Cranston, RI 02910 USA  
 Phone: 401.461.1200 Fax: 401.941.5310  
 Email: [info@leonardvalve.com](mailto:info@leonardvalve.com)  
 Web Site: <http://www.leonardvalve.com>