


DIAL THERMOMETERS

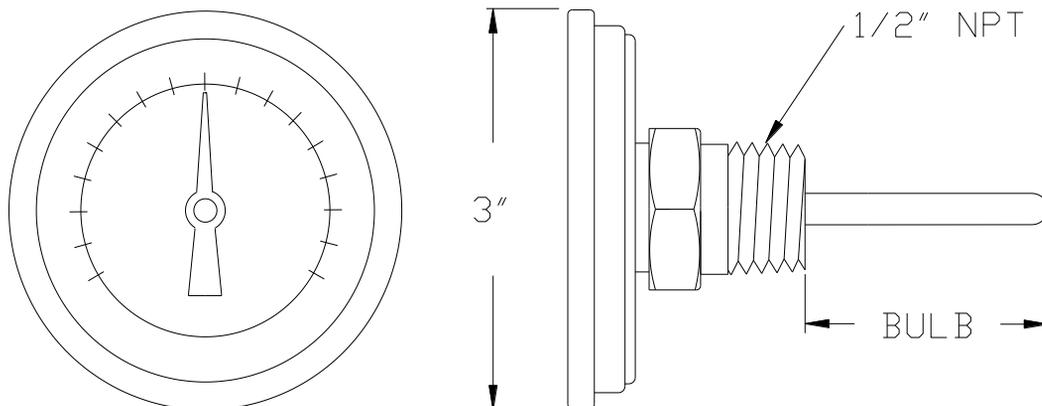

37C30A

- 1" (25mm) bulb
- 0 to 140°F, -20 to 60°C
- 2 colors, green (90-105°F, 32-41°C), red (105-140°F, 41-60°C)
- Used on 1/2", 3/4", 1" valves

2104

- 2" (51mm) bulb
- 0 to 140°F, -20 to 60°C
- 2 colors, green (90-105°F, 32-41°C), red (105-140°F, 41-60°C)
- Used on 1-1/4", 1-1/2", 2" valves

2109

- 3-1/2" (89mm) bulb
- -40 to 160°F, -40 to 70°C
- No colors
- Used on 3", 4" valves

CONTINUED ON PAGE 2

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>

DIAL THERMOMETERS CONTINUED

37C30B

- 2" (51mm) bulb
- 0 to 250°F, -20 to 120°C
- No colors
- High Temperature option on 1-1/4", 1-1/2", 2" valves

37C20A

- 1-1/8" (29mm) bulb
- 20 to 240°F, -5 to 115°C
- No colors
- Used on steam & water valves, inlet hot 3/4", 1", High temp option 3/4", 1"

37C60

- 2" (51mm) bulb
- 25-125°F, -5 to 50°C
- No colors
- Used in 37C50FL assembly

2122

- 1" (25mm) bulb
- 0 to 140°F, -20 to 60°C
- 3 colors, green (65-90°F, 18-32°C), yellow (90-100°F, 32-38°C)
red (100-140°F, 38-60°C)
- Used on all emergency valves

2118

- 3-1/2" (89mm) bulb
- 0-200°F, -20 to 95°C
- No colors
- Inlet hot 3", 4"



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>