

Wall Mounted Shower Systems



Leonard Surfashower® Wall-Mounted Shower Systems

Offered in thermostatic or pressure actuated models with standard or ADA compliant shower head/hand shower configurations.




Wall Mounted Shower Systems


Wall mounted shower systems for health care, educational, penal, industrial, recreational and other commercial/institutional applications

- Thermostatic or pressure balance or single temperature models
- Single or multiple user models
- ADA compliant models
- Durable stainless steel cover to conceal exposed piping
- Vandal-resistant, factory-preassembled
- Variety of shower head, hand held shower options
- Listed to ASSE Standard 1016 Type P or T

Single User Surfashower® Systems

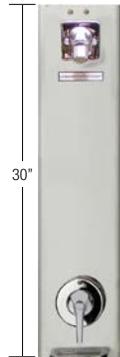

Institutional Shower Head SS-7600-100/3ISA

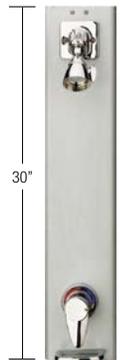

Ball Joint Shower Head SS-PAM-204



Integral Vertical Extension SS-PAM-204VX

Pressure Balanced Models



SS-PAM-200/3ISA
Surfashower® with pressure balancing valve, stainless steel balancing piston

H-06 fixed spray institutional shower head, 2.5 GPM (9.5 l/min) stainless steel cover, 18 gauge, #4 finish, sloping top cap, bottom cap, vandal resistant screws, factory-assembled



SS-PAM-200/3ISA-ADJ
H-06ADJ adjustable spray institutional shower head, 2.5 GPM (9.5 l/min)



SS-PAM-204
H-03 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min)



SS-PAM-202
H-01 (AC-11) ball joint shower head, 2.5 GPM (9.5 l/min) with volume control



SS-PAM-H06/C102S
H-06/C10-2S ball joint shower head with fixed spray, 2.0 GPM (7.6 l/min)

Thermostatic Models

SS-7600-100/3ISA
Surfashower® with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes

SS-7600-100/3ISA-ADJ

SS-7600-104

SS-7600-102

SS-7600-H06/C102S

Options (for all Single User Models)

Suffix RSD	Recessed soap dish
Suffix COR	Cover modified for corner installation
Suffix VX	Integral vertical extension to ceiling (specify ceiling height and shower head height)

Special 1.5 GPM (5.6 l/min) showerheads available

Multiple User Surfashower® Systems



Three Person Models

Pressure Balanced Models

SS-PAM-200/3ISA-3P Surfashower® with pressure balancing valve, stainless steel balancing piston

Thermostatic Models

SS-7600-100/3ISA-3P Surfashower® with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes

H-06 fixed spray institutional shower heads, three station stainless steel cover, 18 gauge, #4 finish mounting brackets, top and bottom cap, vandal resistant screws, factory-assembled

SS-PAM-204-3P

SS-7600-104-3P

H-03 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min)

Two Person Models

SS-PAM-200/3ISA-2P

SS-7600-100/3ISA-2P

Two stations with H-06 fixed spray institutional shower heads, 2.5 GPM (9.5 l/min)

SS-PAM-204-2P

SS-7600-104-2P

H-03 adjustable spray ball joint shower heads, 2.5 GPM (9.5 l/min)

Multiple User Surfashower® Systems with ADA Station



Three Person Models

Pressure Balanced Models

SS-PAM-200/3ISA-3P-HC

Thermostatic Models

SS-7600-100/3ISA-3P-HC

One ADA-compliant station with fixed shower spray head, diverter valve, and hand shower, two standard shower stations with fixed spray shower heads.

Two Person Models

SS-PAM-200/3ISA-2P-HC

Surfashower® with pressure balancing valve, stainless steel balancing piston

SS-7600-100/3ISA-2P-HC


Surfashower® with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes

One ADA-compliant station to include fixed spray institutional shower head, inline diverter valve with lever handle, hand shower 2.5 GPM (9.5 l/min) with chrome hose, spray head, glide bar, double check valve, supply elbow, factory-assembled, one standard shower station with fixed institutional shower head.

Options (for all Multiple User Models)

Suffix **VX** Integral vertical extension to ceiling (specify ceiling height and shower head height)

Single User Surfashower® Systems

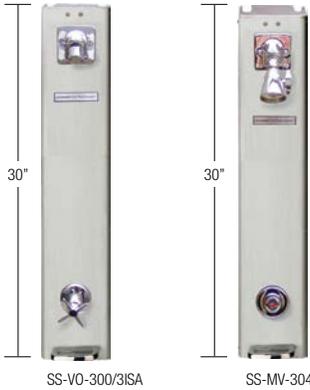

Single Temperature Models

Compression Shutoff Models

SS-VO-300/3ISA Surfashower® with compression shutoff

H-06 fixed spray institutional shower head, stainless steel cover, 18 gauge, #4 finish, sloping top cap, bottom cap, vandal resistant screws

SS-VO-300/3ISA-ADJ

H-06ADJ adjustable spray institutional shower head, 2.5 GPM (9.5 l/min)

SS-VO-302

H-01 (AC-11) ball joint shower head, 2.5 GPM (9.5 l/min) with volume control

SS-VO-304

H-03 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min)

SS-VO-H06/C102S

H-06/C10-2S ball joint shower head with fixed spray, 2.0 GPM (7.6 l/min)

Metering Valve Models

SS-MV-300/3ISA Surfashower® with metering valve, fixed cycle, 30 seconds

SS-MV-300/3ISA-ADJ

SS-MV-302


SS-MV-304

SS-MV-H06/C102S

Options (for all Single User Models)

Suffix **VX** Integral vertical extension to ceiling (specify ceiling height and shower head height)

Exposed Piping Surfashower® Systems

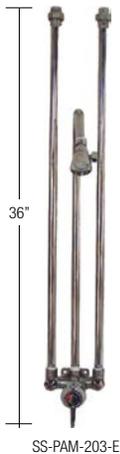

Pressure Balancing Models

SS-PAM-203-E Surfashower®

For exposed piping applications, supply risers with union connections, outlet gooseneck, H-02 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min) pipe supports, all chrome plated finish.

SS-PAM-201-E Surfashower®

H-01 (AC-11) ball joint shower head, 2.5 GPM (9.5 l/min) with volume control

Thermostatic Models

SS-7600-103-E Surfashower®

For exposed piping applications, supply risers with union connections, outlet gooseneck, H-02 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min) pipe supports, all chrome plated finish, copper encapsulated thermostatic valve assembly.

SS-7600-101-E Surfashower®

H-01 (AC-11) ball joint shower head, 2.5 GPM (9.5 l/min) with volume control

ADA Shower Head/Hand Shower Units



SS-PAM-200/3ISA-D2L/501P(G)-44

Pressure Balanced Models

SS-PAM-200/3ISA-D2L/501P(G)-44

Surfashower® with pressure balancing valve, stainless steel balancing piston

H-06 fixed spray shower head, inline diverter valve with lever handle, hand shower with spray head, 2.5 GPM (9.5 l/min) chrome hose, glide bar, double check valve, supply elbow, stainless steel cover, 18 gauge, #4 finish, sloping top cap, bottom cap, vandal resistant screws, factory-assembled.




Thermostatic Models

SS-7600-100/3ISA-D2L/501P(G)-44

Surfashower® with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes

ADA Hand Shower Only Units

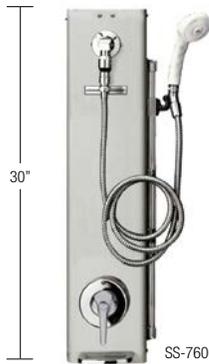

SS-7600-501P(G)

Pressure Balanced Models

SS-PAM-501P(G) Surfashower®

with pressure balancing valve, stainless steel balancing piston

Hand shower, spray head, chrome hose, glide bar, double check valve, stainless steel cover, 18 gauge, #4 finish, sloping top cap, bottom cap, vandal resistant screws, factory-assembled



Thermostatic Models

SS-7600-501P(G) Surfashower®

with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes

SS-5700 Barrier Free Surfashower® System with:


- Recess shower panel, 16 gauge stainless steel, #4 finish, with recessed soap dish
- Pressure balanced shower valve, lever handle
- Diverter valve with lever handle
- Fixed spray institutional shower head
- Hand held shower, stainless steel hose, wall hook, double check valve
- Horizontal corner grab bar, 18 gauge stainless steel
- Folding seat with cushion, stainless steel frame and brackets (mounted right)



Options for Barrier Free Systems


Suffix **RVLS** Valve mounted right, seat mounted left

Suffix **QD** Quick disconnect on hand shower

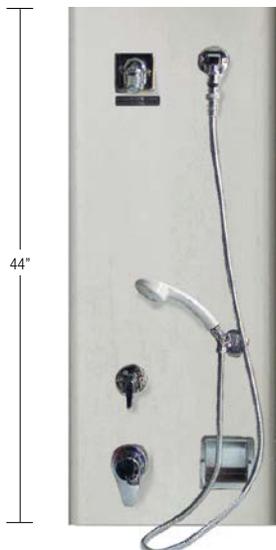

SS-5700

Horizontal Pipe Cover Units

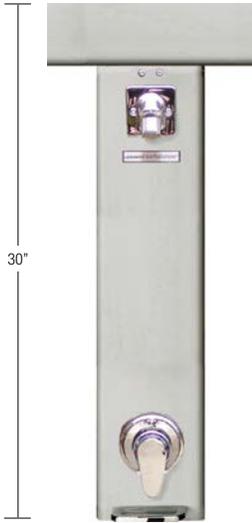

SS-PAM-200/3ISA-HC

SS-HC Sloping Top Horizontal Pipe Cover with Surfashower® Units Attached

- **SS-PAM** pressure balancing or **SS-7600** Thermostatic Surfashower® units
- Sloping top horizontal pipe cover, 18 gauge stainless steel, #4 finish
- Back plate sections, 16 gauge, furnished in 12" lengths, one back plate per three feet of SS-HC, with screws
- Horizontal supply piping by others

Note: All specifications are subject to change without notice!



1360 Elmwood Avenue
Cranston, RI 02910 USA
800.222.1208
t 401.461.1200
f 401.941.5310
info@leonardvalve.com
www.leonardvalve.com

LV-104 3/15

©2015 Leonard Valve Company. Printed in the U.S.A.