

## AQUATROL® COMBINATIONS

**4507**


### 4500 AQUATROL® Pressure Actuated Mixer

- Durable stainless steel balancing piston to equalize hot and cold supply pressures.
- Built-in shutoff for single handle operation
- Removable one piece upper and lower valve seat
- Internal parts of bronze and stainless steel
- Cast wall flange and lever handle, polished chrome plated
- Maximum operating pressure: 125 PSIG (860KPA)
- Adjustable high temperature limit stop set for 110°F\* (43°C)
- Color coded dial, Off through Hot, with directional indicators
- Angle checkstops, copper tube connection
- Plasterguard/thin wall mounting bracket included.
- D Diverter spout, 1/2" or 3/4" IPS
- 501P(G) 24" glide rail, 2.5 GPM (9.5 l/min) max flow rate
- Double check valve assembly

Valve is ASSE · 1016 Certified

Valve is CSA · B.125-05 Certified




#### OPTIONS:

- \_\_\_ SUFFIX 501P(G)-30 30" glide rail in place of 24" glide rail on 501P(G)
- \_\_\_ SUFFIX Less Invb. Less inline vacuum breaker on hand shower
- \_\_\_ SUFFIX RV Reinforced vinyl hose on hand shower
- \_\_\_ SUFFIX QD Quick disconnect on hand shower

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.Ca.gov](http://www.P65Warnings.Ca.gov)

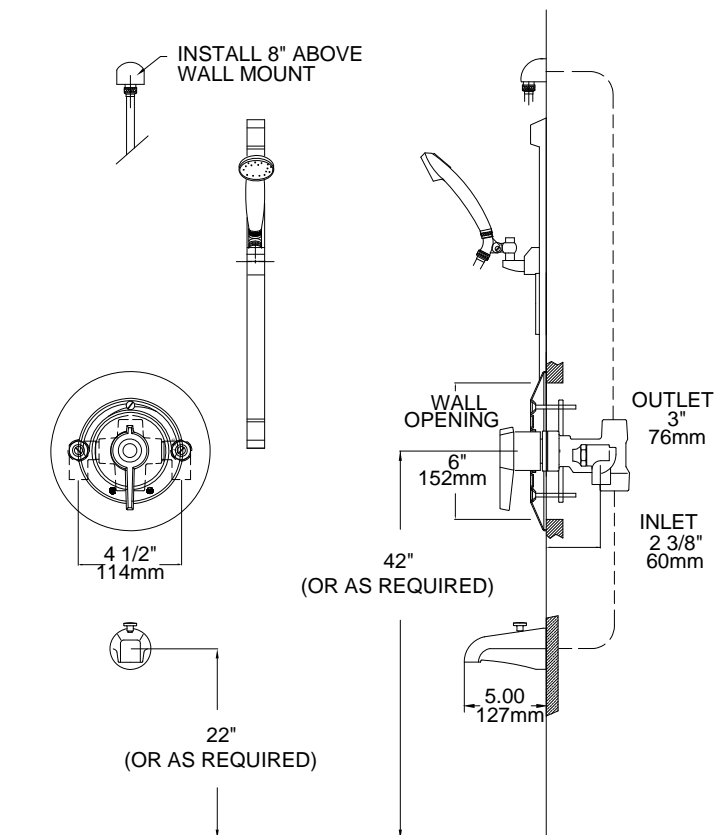

<b>Engineer's Approval</b>	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA  
 Phone: 401.461.1200 Fax: 401.941.5310  
 Email: [info@leonardvalve.com](mailto:info@leonardvalve.com)  
 Web Site: <http://www.leonardvalve.com>