


WALL MOUNTED SHOWER SYSTEMS

surfashower®

- SS-PAM-200/3ISA
- SS-PAM-202
- SS-PAM-204
- SS-PAM-H15

PRESSURE ACTUATED MODELS

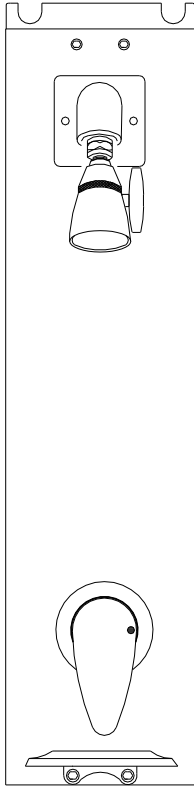

SS-PAM-204

SS-PAM-200/3ISA Surfashower®

- PAM® -II, Pressure Actuated Shower Mixer
- Stainless steel pressure balancing piston
- Built-in shutoff for single handle operation
- Color-coded dial
- Adjustable high temperature limit stop set for 110°F* (43°C)
- Integral check stops, soap dish
- H-06 institutional shower head, 2.5 GPM (9.5 l/min.) max
- Special cast mounting bracket
- Factory pre-assembled, 18 gauge stainless steel cover, #4 finish, with sloping top cap, regular bottom cap.
- Exposed parts chrome plated, vandal-resistant.
- 1/2" flexible stainless hose on inlets.
- Maximum operating pressure: 125 PSI (860 KPA)

SS-PAM-202

- H-10 (H-01 showerhead with institutional base) volume control, ball joint shower head 2.5 GPM (9.5 l/min.)

SS-PAM-204

- H-07 (H-03 showerhead with institutional base) adjustable spray ball joint shower head 2.5 GPM (9.5 l/min.)

SS-PAM-H15

- H-15 (H-14 showerhead with institutional base) adjustable spray ball joint shower head 1.5 GPM (5.7 l/min)

OPTIONS:

- ___ SUFFIX VX - Integral stainless steel extension to ceiling, specify length ___". See reverse side to calculate VX length
- ___ SUFFIX C102S - C102S Brass showerhead 2.0 GPM flow rate
- ___ SUFFIX ADJ- 3ISA ONLY Adjustable shower head 2.5 GPM (9.5 l/min)
- ___ SUFFIX 1.5- 3ISA ONLY H-06 Shower head with 1.5 GPM flow rate

VALVE IS ASSE 1016 LISTED
VALVE IS CSA LISTED



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov


Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____




1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>

PRESSURE ACTUATED MODELS

SS-PAM-200/3ISA/C102S

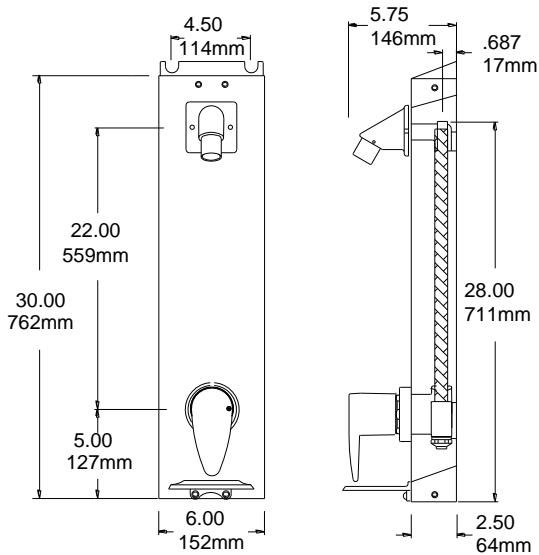

SS-PAM-204/SSPAM-202 /SS-PAM-H15


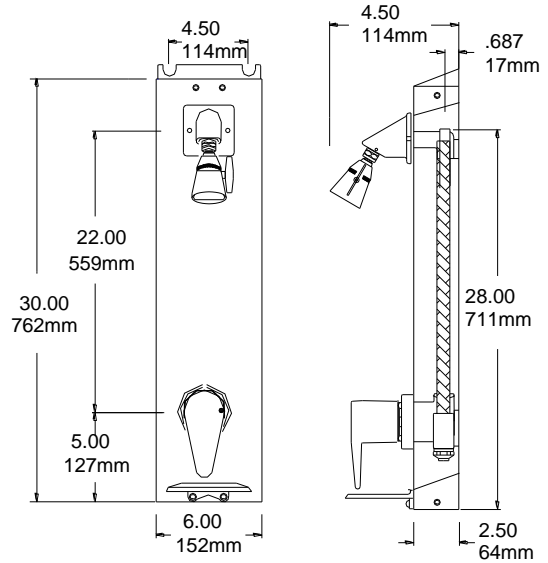


SUFFIX VX (For SS-PAM- 200/3ISA)(C102S)

VX Length:
To calculate:
**VX Length= Ceiling height
minus shower head height
minus 5" (127mm)**

SUFFIX VX (For SS-PAM-204)

VX Length:
To calculate:
**VX Length= Ceiling height minus shower
head height minus 7 1/2" (191mm) (-204)
minus 8 1/4" (209mm) (-202), (H15)**

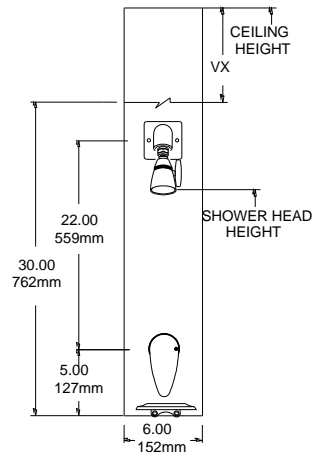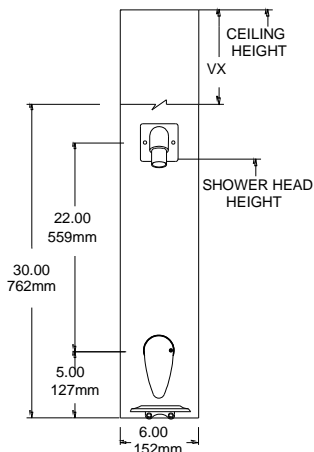

***NOTE:** A limit stop, set for 110°F (43°C), is simply a mechanical setting to prevent excessive handle rotation. If incoming water is hotter than 135°F (57°C), the temperature of the factory test, the valve when turned to full HOT may deliver water in excess of 110°F and the limit stop **MUST BE RESET BY THE INSTALLER**



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>