



Mixing Safety & Performance for Over 100 Years

WALL MOUNTED SHOWER SYSTEMS



ASSE 1016

Made in the USA with Domestic and Imported Parts

1360 Elmwood Ave., Cranston, RI 02910
TF: 800.222.1208 | P: 401.461.1200 | F: 401.941.5310
www.leonardvalve.com

WALL MOUNTED SHOWER SYSTEMS

Wall mounted shower systems for health care, educational, penal, industrial, recreational and other commercial/institutional applications

- Thermostatic or pressure balance or single temperature models
- Single or multiple user models
- ADA compliant models
- Durable stainless steel cover to conceal exposed piping
- Vandal-resistant, factory-preassembled
- Variety of shower head, hand held shower options
- Multiple shower heads with variable flow rates of 1.5, 2.0, 2.5 GPM
- Hand showers are standard with ADA non-positive shut-off push button
- Multiple flow rate shower heads and hand showers available

Single User Surfashower® Systems



Pressure Balanced Models

SS-PAM-200/3ISA

Surfashower® with pressure balancing valve, stainless steel balancing piston

Thermostatic Models

SS-7600-100/3ISA

Surfashower® with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes

H-06 fixed spray institutional shower head, 2.5 GPM (9.5 l/min) stainless steel cover, 18 gauge, #4 finish, sloping top cap, bottom cap, vandal resistant screws, factory-assembled



SS-PAM-200/3ISA-ADJ

H-06ADJ adjustable spray institutional shower head, 2.5 GPM (9.5 l/min)

SS-7600-100/3ISA-ADJ



SS-PAM-204

H-03 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min)

SS-7600-104



SS-PAM-202

H-01 (AC-11) ball joint shower head, 2.5 GPM (9.5 l/min) with volume control

SS-7600-102



SS-PAM-H06/C102S

H-06/C10-2S ball joint shower head with fixed spray, 2.0 GPM (7.6 l/min)

SS-7600-H06/C102S

SS-PAM-H-15

H-15 adjustable spray, ball joint, massage showerhead, 1.5 GPM (5.71 l/min), high impact, ABS body, chrome plated

SS-7600-H-15

Options (for all Single User Models)

Suffix RSD Recessed soap dish

Suffix COR Cover modified for corner installation

Suffix VX Integral vertical extension to ceiling (specify ceiling height and shower head height)



Institutional Shower Head
SS-7600-100/3ISA

Ball Joint Shower Head
SS-PAM-204

Integral Vertical Extension
SS-PAM-204VX

WALL MOUNTED SHOWER SYSTEMS

ADA Shower Head/Hand Shower Units

Pressure Balanced Models

SS-PAM-200/3ISA-D2L/501P(G)-44

Surfashower® with pressure balancing valve, stainless steel balancing piston

H-06 fixed spray shower head, inline diverter valve with lever handle, hand shower with spray head, 2.5 GPM (9.5 l/min) chrome hose, glide bar, double check valve, supply elbow, stainless steel cover, 18 gauge, #4 finish, sloping top cap, bottom cap, vandal resistant screws, factory-assembled



Thermostatic Models

SS-7600-100/3ISA-D2L/501P(G)-44

Surfashower® with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes



SS-PAM-200/3ISA-D2L/501P(G)-44

ADA Hand Shower Only Units

Pressure Balanced Models

SS-PAM-501P(G) Surfashower®

with pressure balancing valve, stainless steel balancing piston both pressure and temperature

Hand shower, spray head, chrome hose, glide bar, double check valve, stainless steel cover, 18 gauge, #4 finish, sloping top cap, bottom cap, vandal resistant screws, factory-assembled



Thermostatic Models

SS-7600-501P(G) Surfashower®

with copper encapsulated thermostatic valve, compensates for changes



SS-7600-501P(G)

SS-5700 Barrier Free Surfashower® System

- Recess shower panel, 16 gauge stainless steel, #4 finish, with recessed soap dish
- Pressure balanced shower valve, lever handle
- Diverter valve with lever handle
- Fixed spray institutional shower head
- Hand held shower, stainless steel hose, wall hook, double check valve)



SS-5700

WALL MOUNTED SHOWER SYSTEMS



SS-7600-100/3ISA-3P

Multiple User Surfashower® Systems

Three Person Models

Pressure Balanced Models

SS-PAM-200/3ISA-3P Surfashower® with pressure balancing valve, stainless steel balancing piston

H-06 fixed spray institutional shower heads, three station stainless steel cover, 18 gauge #4 finish mounting brackets, top and bottom cap, vandal resistant screws, factory-assembled

SS-PAM-204-3P

H-03 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min)

Thermostatic Models

SS-7600-100/3ISA-3P Surfashower® with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes

SS-7600-104-3P

Two Person Models

Pressure Balanced Models

SS-PAM-200/3ISA-2P

Two stations with H-06 fixed spray institutional shower heads, 2.5 GPM (9.5 l/min)

SS-PAM-204-2P

H-03 adjustable spray ball joint shower heads, 2.5 GPM (9.5 l/min)

Thermostatic Models

SS-7600-100/3ISA-2P

SS-7600-104-2P



SS-PAM-200/3ISA-2P-HC

Multiple User Surfashower® Systems with ADA Station

Three Person Models

Pressure Balanced Models

SS-PAM-200/3ISA-3P-HC

One ADA-compliant station with fixed shower spray head, diverter valve, and hand shower, two standard shower stations with fixed spray shower heads.

Thermostatic Models

SS-7600-100/3ISA-3P-HC

Two Person Models

Pressure Balanced Models

SS-PAM-200/3ISA-2P-HC

Surfashower® with pressure balancing valve, stainless steel balancing piston

Thermostatic Models

SS-7600-100/3ISA-2P-HC

Surfashower® with copper encapsulated thermostatic valve, compensates for both pressure and temperature changes

One ADA-compliant station to include fixed spray institutional shower head, inline diverter valve with lever handle, hand shower 2.5 GPM (9.5 l/min) with chrome hose, spray head, glide bar, double check valve, supply elbow, factory-assembled, one standard shower station with fixed institutional shower head.

Single User Surfashower® Systems

Single Temperature Compression Shutoff Models

SS-VO-300/3ISA Surfashower® with compression shutoff H-06 fixed spray institutional shower head, stainless steel cover, 18 gauge, #4 finish, sloping top cap, bottom cap, vandal resistant screws



SS-VO-300/3ISA

SS-VO-300/3ISA-ADJ

H-06ADJ adjustable spray institutional shower head, 2.5 GPM (9.5 l/min)

SS-VO-302

H-01 (AC-11) ball joint shower head, 2.5 GPM (9.5 l/min) with volume control

SS-VO-304

H-03 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min)

SS-VO-H06/C102S

H-06/C10-2S ball joint shower head with fixed spray, 2.0 GPM (7.6 l/min)

Exposed Piping Surfashower® Systems

Pressure Balancing Models

SS-PAM-203-E Surfashower®

For exposed piping applications, supply risers with union connections, outlet gooseneck, H-02 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min) pipe supports, all chrome plated finish, copper encapsulated



SS-PAM-203-E

SS-PAM-201-E Surfashower®

H-01 (AC-11) ball joint shower head, 2.5 GPM (9.5 l/min) with volume control

Thermostatic Models

SS-7600-103-E Surfashower®

For exposed piping applications, supply risers with union connections, outlet goose neck, H-02 adjustable spray ball joint shower head, 2.5 GPM (9.5 l/min) pipe supports, all chrome plated finish, thermostatic valve assembly.


SS-7600-101-E Surfashower®

H-01 (AC-11) ball joint shower head, 2.5 GPM (9.5 l/min) with volume control

Horizontal Pipe Cover Units

SS-HC Sloping Top Horizontal Pipe Cover with Surfashower® Units Attached

- SS-PAM pressure balancing or SS-7600 Thermostatic Surfashower® units
- Sloping top horizontal pipe cover, 18 gauge stainless steel, #4 finish
- Back plate sections, 16 gauge, furnished in 12" lengths, one back plate per three feet of SS-HC, with screws
- Horizontal supply piping by others

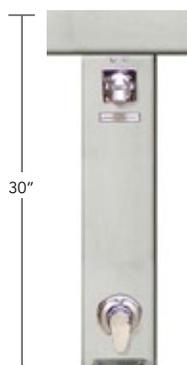

SS-PAM-200/3ISA-HC



1360 Elmwood Ave., Cranston, RI 02910
TF: 800.222.1208 | P: 401.461.1200
F: 401.941.5310 | www.leonardvalve.com