




Thermostatic MIXING VALVE

ECO-MIX™ XL-52-LF-DT-RF-R34 Exposed Assemblies

XL-52-LF-DT-RF-R34
3/4" inlets and 1" outlet

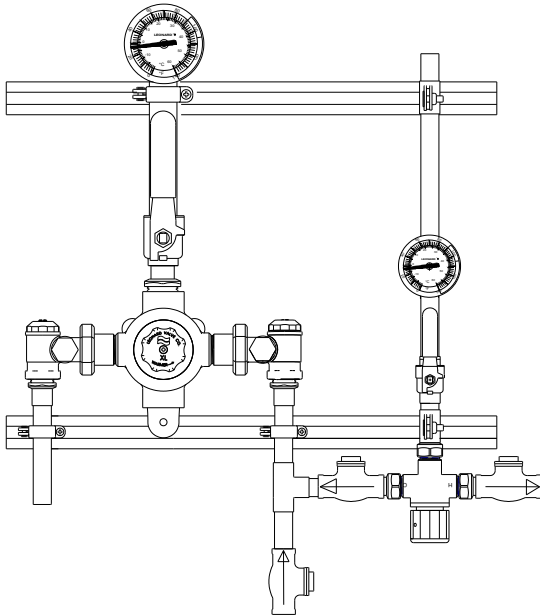

- Group / Individual Shower Control Unit
- High Low Thermostatic Water Mixing Valve with 1 GPM (3.8 l/min) minimum flow capacity +
- 3/4" sweat inlets, 1" sweat outlet (19 mm x 25 mm)
- Integral combination checkstops with strainers and wall support
- 125 PSI (8.6 BAR) maximum operating pressure
- Copper encapsulated thermostatic assembly with stainless steel shuttle
- Locking temperature regulating handle
- Temperature adjustment range, 90-140°F (32-60°C)**
- Combination checkstops, unions, strainers on inlets wall support, cast lever handle
- Outlet ball valve with Thermometer
- 3/4" Return loop with thermometer and ball valve
- 3/4" Leonard ARV automatic return valve, (return limiter)
- Check valves on either side of ARV
- Complete unit mounted on heavy duty strut, for ease of installation
- Valve assembly rough bronze finish
- Factory assembled and tested
- See Flow Capacity Chart reverse side

OPTIONS:

___RPI- Return piping 1", ARV replaced by 1" circuit setter



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

+NOTE: The valve will maintain temperature with 0.5GPM flow from the domestic hot water loop when properly installed near the hot water source with a continuously operating recirculation pump.

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____




Valve assembly is certified to meet Low-Lead requirements of wetted surface area containing less than 0.25% lead by weight. All other fittings and components, the sum total of which comprise the wetted surface of this product contains less than one quarter of one percent of lead by weight.

**NOTE: For temperatures outside of this valve's stated range, please see our line of bi-metal valves.




1360 Elmwood Avenue, Cranston, RI 02910 USA
 Phone: 401.461.1200 Fax: 401.941.5310
 Email: info@leonardvalve.com
 Web Site: <http://www.leonardvalve.com>

XL-52-LF-DT-RF-R34

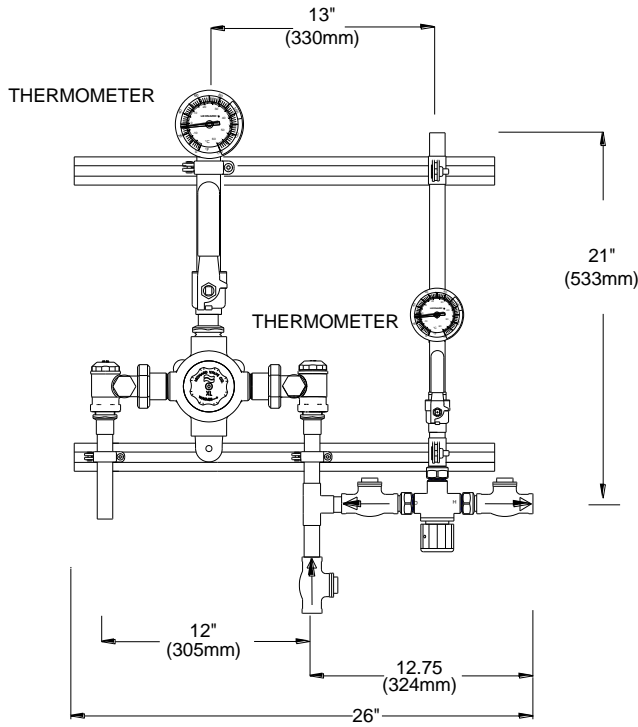

PRESSURE DROP											
MIN+ FLOW	5	10	15	20	25	30	35	40	45	50	PSI
	0.3	0.7	1	1.4	1.7	2.1	2.4	2.8	3.1	3.4	BAR
1	18	26	31	36	40	44	47	50	53	55	GPM
3.8	68	98	117	136	151	167	178	189	201	208	l/min

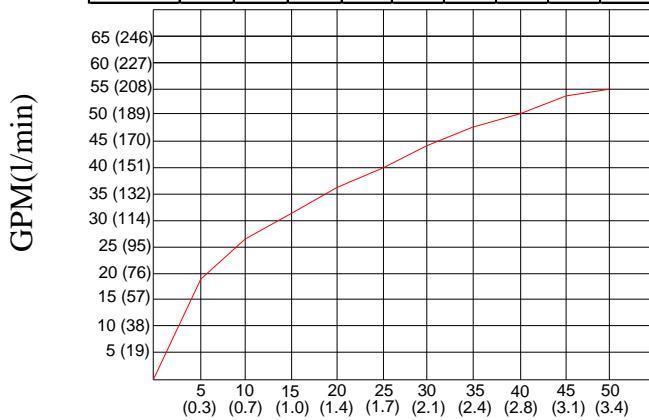

PRESSURE DROP
PSI(BAR)



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>