
THERMOSTATIC MIXING VALVE $ECO-MIX^{TM}$




This product is certified to meet Low Lead requirements of wetted surface area containing less than 0.25% lead by weight

****NOTE:** For temperatures outside of this valve's stated range, please see our line of bi-metal valves.

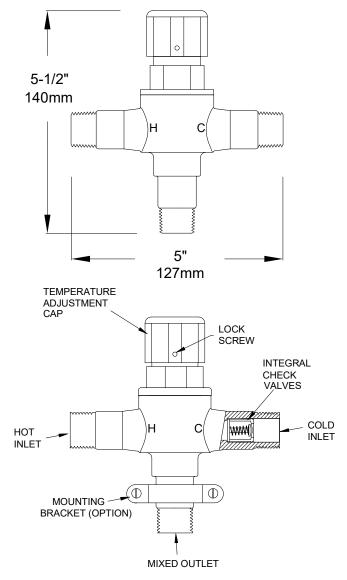

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

* 0.25 GPM minimum flow certified to ASSE 1070



© 2024 Leonard Valve Company Printed in USA

Submittal Data Sheet S-827-LF November, 2024

MODEL 270-LF LEAD FREE THERMOSTATIC POINT OF USE MIXING VALVE

MODEL ¹/₂" inlets, ¹/₂" outlet, (MIPS connections)

MATERIALS:

- Lead Free Bronze body
- Locked temperature adjustment cap (vandal resistant)
- Copper encapsulated thermostat assembly with polymer thermoplastic shuttle
- Stainless steel springs
- Integral check valves on hot and cold inlets

PRESSURE-TEMPERATURE:

- Minimum Flow: 0.25 GPM (0.95 l/Min)*
- Maximum Pressure: 125 PSI (8.6 BAR)
- Maximum Hot Water temperature: 200°F- (93°C)
- Approach Temperature 5°F (2.8°C) above set point.
- Temperature adjustment range, 90-140°F (32-60°C) **

OPTIONS:

- ____SUFFIX BRKT Mounting Bracket (Shipped Loose)
- ____SUFFIX BV Ball Valves, 3 included (Shipped Loose)
- ____SUFFIX SW Sweat Connections, 3 included (Shipped Loose)
- SUFFIX CP Chrome Plated
- SUFFIX DT Dial Thermometer and Tee (Shipped Loose)
 - __SUFFIX PEX F1807 Pex Adapters, union style, 3 included (Shipped Loose)

Certifications:

ASSE 1017, 1070





CSA

Certified to NSF61 thru the ASSE 1070 testing process

6P

PRESSURE DROP						
5	10	20	30	40	50	PSI
.35	.70	1.4	2.1	2.8	3.4	BAR
3.5	5.5	7.5	9.5	10.5	12	GPM
13	21	28	36	40	45	l/min



1360 Elmwood Avenue, Cranston, RI 02910 USA Phone: 401.461.1200 Fax: 401.941.5310 Email: info@leonardvalve.com Web Site: http://www.leonardvalve.com